

# MAPESIL AC

Pure, mould-resistant, acetic silicone sealant with BioBlock technology for movements up to 25%. Produced without use of fossil resources, packaged in recycled cartridge, and with fully offset Residual Greenhouse Gas emissions



## BENEFITS AND FEATURES

- Available in 40 colors
- Solvent-free and with very low emissions of volatile organic compounds
- Certified for various applications in the building industry
- High flexibility
- High durability, to resist over time
- High resistance to mould
- Impermeable to water and gases
- Resistant to high temperatures

## CO<sub>2</sub>e FULLY OFFSET PRODUCTS

Residual Greenhouse Gas emissions measured throughout the life cycle of this product using Life Cycle Assessment (LCA) methodology, verified and certified with EPDs, have been offset for the year 2026 through the acquisition of carbon credits in support of forestry protection projects. For more details on emission calculations and offsetting projects, visit [mapei.com](https://mapei.com).

## WHERE TO USE

**Mapesil AC** is a one-component, acetic cross-linking silicone sealant suitable for sealing glass, ceramics and inox metal, certain types of plastic and rubber. With the adhesion promoter **Mapei Primerseal M** or **Mapei Primerseal A** it can also be used on concrete, wood, mineral substrates, oxidisable metals.

**Mapesil AC** is used for:

- sealing expansion, contraction and fillet joints subject to movement up to 25% of the initial size, according to standard EN 15651;
- forming a perfectly flexible and waterproof seal between construction elements in building, mechanical engineering, manufacturing, etc.

## TECHNICAL CHARACTERISTICS

**Mapesil AC** is a thixotropic paste that can be easily applied horizontally and vertically. It hardens following exposure to atmospheric humidity at ambient temperature, forming a flexible and waterproof product.

**Mapesil AC** adheres without primer to glass, ceramics, inox metal, and many types of plastics (due to the wide variety of materials, it is advisable to always carry out preliminary tests).

It adheres even to mineral or absorbent building materials when combined with **Mapei Primerseal A** adhesion promoter. Increased adhesion even on non-absorbent materials when combined with **Mapei Primerseal M**.

In the case of sealings subject to severe service conditions (e.g., immersion, soaking, high movements, ...), the use of an appropriate adhesive primer is strongly recommended: please contact Mapei Technical Assistance.

After complete crosslinking, **Mapesil AC** is suitable for interior or exterior use in dry, wet, humid or underwater environments, with operating temperatures between -40°C and +180°C.

**Mapesil AC** is CE marked according to EN 15651-1, EN 15651-2, EN 15651-3, EN 15651-4.

Furthermore, **Mapesil AC** has very low emissions of volatile organic compounds (VOC) and is classified as EMICODE EC1 Plus classification according to GEV protocol.

## RECOMMENDATIONS

- If **Mapesil AC** is used in exterior, light surface dirt may build up on the surfaces, though it will be easily washed off by rain. Please contact Mapei Technical Service to identify the most suitable solution.
- For sealing surfaces sensitive to acids such as limestone, use a specific neutral silicone sealant (e.g. **Mapesil LM** or **Mapesil Stone Matt**).
- The use of **Mapesil AC** is not recommended on highly plasticised material or on bituminous surfaces because of the release of substances that reduce bonding and penetrate into the sealant, altering the colour and resistance.
- The resistance of **Mapesil AC** to chemicals is excellent; however, due to the variety of products and working conditions under which it can be used, it is necessary to carry out preliminary tests.
- Do not use **Mapesil AC** to seal aquariums.
- For sealing floor joints subject to heavy traffic, use a polyurethane (e.g. **Mapeflex PU 45 FT**) or epoxy-polyurethane (**Mapeflex E-PU 21 SL**) sealant.

## APPLICATION PROCEDURE

### Preparation and size of the joint

All the surfaces to receive the sealant must be dry, solid, and free from dust and loose particles, oils, grease, wax, old paint, and rust. In order for the sealant to carry out its function, provision must be made for it to elongate and compress freely.

Therefore, during application it is necessary that:

- it only bonds only to the side walls of the joint, and not to the bottom;
- the joint is sized correctly so that the product does not extend more than 25% of the initial width of the joint (calculated at +20°C);
- the correct sealing section, in order to take full advantage of the sealant's flexible performance, complies with the proportion criterion below:

|                                |   |    |    |    |      |    |      |      |      |      |
|--------------------------------|---|----|----|----|------|----|------|------|------|------|
| width of joint (mm) <b>W</b>   | 5 | 10 | 15 | 20 | 25   | 30 | 35   | 40   | 45   | 50   |
| depth of sealant (mm) <b>D</b> | 5 | 10 | 10 | 10 | 12.5 | 15 | 17.5 | 20   | 20   | 20   |
| <b>Mapefoam</b> diameter (mm)  | 6 | 15 | 20 | 25 | 30   | 40 | 40   | 2x20 | 2x25 | 2x30 |

To control the depth of **Mapesil AC** and prevent it from adhering to the bottom of the joint, use the appropriate pre-formed closed-cell polyethylene foam cord **Mapectoam**.

Application of the primer

Where the use of **Mapei Primerseal A** or **Mapei Primerseal M** is necessary, they must be applied with a brush on the relevant areas of the joints and left to dry, and then apply **Mapesil AC**.

Application of Mapesil AC

**Mapesil AC** is packed in 310 ml recycled plastic cartridges; to use, cut the cartridge above the end of the thread and screw on the nozzle, cutting it at 45° to produce a hole corresponding to the size of the joint. Insert the cartridge into the gun and extrude the sealant.

The surface of **Mapesil AC** must be finished off with a tool (e.g. **Mapei Perfect Seal**) moistened with **UltraCare Smooth Silicone** by MAPEI, before the surface film forms.

Alternatively, dry smoothing is possible after protecting the joint edges with adhesive paper masking tapes, which must be removed immediately after surface finishing.

Crosslinking

When **Mapesil AC** is exposed to the air, the surrounding humidity sets off the cure reaction and the sealant becomes flexible.

The speed at which **Mapesil AC** crosslinks depends only slightly on temperature, but is fundamentally linked to humidity in the atmosphere.

CLEANING


Traces of unpolymerised **Mapesil AC** may be removed with common solvents (ethyl acetate, petrol, toluene); after complete crosslinking, the silicone rubber may only be removed mechanically. Avoid contact between **Mapesil AC** not yet polymerised and any type of solvent, to avoid delays or inhibition of the final crosslinking process.

CONSUMPTION

**Mapesil AC:**  
consumption varies depending on the joint size. Some examples of consumption for expansion, contraction and fillet joints are shown in the table below.


**Mapei Primerseal A/Mapei Primerseal M:**  
between 100 and 300 g/m².

For the treatment of absorbent substrates, a volume of primer not exceeding 5 percent of the volume of the intended sealant is required.
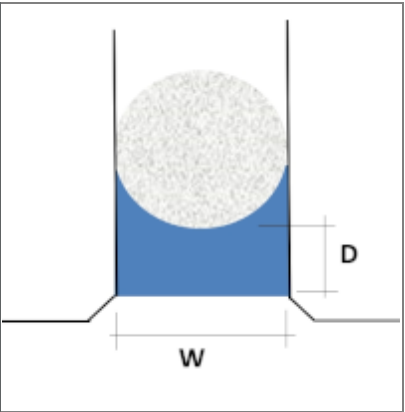
| expansion or contraction joint            |      |     |     |     |      |     |      |     |     |      |  |
|-------------------------------------------|------|-----|-----|-----|------|-----|------|-----|-----|------|---------------------------------------------------------------------------------------|
| width of joint (mm) W                     | 5    | 10  | 15  | 20  | 25   | 30  | 35   | 40  | 45  | 50   |                                                                                       |
| depth of sealant (mm) D                   | 5    | 10  | 10  | 10  | 12.5 | 15  | 17.5 | 20  | 20  | 20   |                                                                                       |
| sealant consumption per linear metre (ml) | 25   | 100 | 150 | 200 | 313  | 450 | 613  | 800 | 900 | 1000 |                                                                                       |
| yield for 310 ml cartridge (m)            | 12.4 | 3.1 | 2.1 | 1.6 | 1.0  | 0.7 | 0.5  | 0.4 | 0.3 | 0.3  |                                                                                       |

| fillet joint |  |  |  |  |  |  |  |  |  |  |  |
|--------------|--|--|--|--|--|--|--|--|--|--|--|
|--------------|--|--|--|--|--|--|--|--|--|--|--|

|                                           |      |     |     |     |     |     |     |
|-------------------------------------------|------|-----|-----|-----|-----|-----|-----|
| width of joint (mm) <b>W</b>              | 5    | 10  | 15  | 20  | 25  | 30  | 35  |
| height of sealant (mm) <b>H</b>           | 5    | 10  | 15  | 20  | 25  | 30  | 35  |
| sealant consumption per linear metre (ml) | 12.5 | 50  | 113 | 200 | 313 | 450 | 613 |
| yield for 310 ml cartridge (m)            | 24.8 | 6.2 | 2.8 | 1.6 | 1.0 | 0.7 | 0.5 |

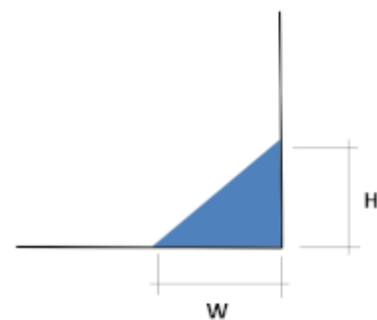

## PACKAGING

### Mapesil AC:

310 ml recycled plastic cartridges, in 12 pcs boxes.

### Mapei Primerseal A/Mapei Primerseal M:

0.25 l and 1 l bottles, in 8 pcs boxes.

## COLOURS

Mapesil AC is available in various colours from the "MAPEI COLOURED GROUTS" range, plus transparent.

| Mapesil AC |                |  |
|------------|----------------|--|
| 100        | WHITE          |  |
| 103        | MOON WHITE     |  |
| 111        | SILVER GREY    |  |
| 123        | ANCIENT WHITE  |  |
| 112        | MEDIUM GREY    |  |
| 113        | CEMENT GREY    |  |
| 114        | ANTHRACITE     |  |
| 127        | ARCTIC GREY    |  |
| 110        | MANHATTAN 2000 |  |
| 187        | LINEN          |  |
| 176        | GREEN-GREY     |  |
| 174        | TORNADO        |  |
| 125        | CASTLE GREY    |  |

|     |                |  |
|-----|----------------|--|
| 119 | LONDON GREY    |  |
| 163 | LIGHT LILAC    |  |
| 168 | CERULEAN       |  |
| 167 | AVIO           |  |
| 169 | STEEL BLUE     |  |
| 172 | SPACE BLUE     |  |
| 177 | SAGE           |  |
| 130 | JASMINE        |  |
| 131 | VANILLA        |  |
| 137 | CARIBBEAN      |  |
| 132 | BEIGE 2000     |  |
| 138 | ALMOND         |  |
| 141 | CARAMEL        |  |
| 142 | BROWN          |  |
| 189 | SPELT          |  |
| 133 | SAND           |  |
| 134 | SILK           |  |
| 188 | BISCUIT        |  |
| 135 | GOLDEN DUST    |  |
| 152 | LIQUORICE      |  |
| 144 | CHOCOLATE      |  |
| 149 | VOLCANO SAND   |  |
| 145 | TERRA DI SIENA |  |
| 143 | TERRACOTTA     |  |
| 136 | MUD            |  |
| 120 | BLACK          |  |
| 150 | YELLOW         |  |

|     |             |  |
|-----|-------------|--|
| 999 | TRANSPARENT |  |
|-----|-------------|--|

Note: Due to the printing process involved, the colours shown are merely indicative

## STORAGE

**Mapesil AC** may be stored up to 24 months in its original cartridges, in a dry and clean place.

**Mapei Primerseal A** or **Mapei Primerseal M**, stored in a cool (not above +25°C) and dry place in the original closed bottles, have a shelf life of 15 months.

## SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

Instructions for the safe use of our products can be found on the latest version of the SDS available from our website [www.mapei.com](http://www.mapei.com).

PRODUCT FOR PROFESSIONAL USE.

## TECHNICAL DATA (typical values)

MAPESIL AC COMPLIES WITH THE STANDARDS: EN 15651-1; EN 15651-2; EN 15651-3; EN 15651-4

### PRODUCT IDENTITY

|                     |                                      |
|---------------------|--------------------------------------|
| Consistency:        | thixotropic paste                    |
| Colour:             | transparent + 40 colours             |
| Density:            | 1.03 g/cm <sup>3</sup> (transparent) |
| Dry solids content: | 100%                                 |
| EMICODE:            | EC1 Plus - very low emissions        |

### APPLICATION DATA (at +23°C - 50% R.H.)

|                                                                               |                                 |
|-------------------------------------------------------------------------------|---------------------------------|
| Recommended application temperature:                                          | from +5°C to +50°C              |
| Extrusion speed from a 3.5 mm nozzle at a pressure of 0.5 N/mm <sup>2</sup> : | 120 g/minute                    |
| Time to form surface skin:                                                    | 10 minutes                      |
| Shrinkage during vulcanisation:                                               | 3.5%                            |
| Speed of vulcanisation:                                                       | 4 mm in 1 day - 10 mm in 7 days |

### FINAL PERFORMANCE

EN 15651-1: sealant for façade joints in interior and exterior, even with cold temperature:

F-EX-INT-CC



|                                                                  |                        |
|------------------------------------------------------------------|------------------------|
| Class:                                                           | 25 LM                  |
| EN 15651-2: sealant for glazing, even with cold temperature:     | G-CC                   |
| Class:                                                           | G 25 LM                |
| EN 15651-3: sealant for sanitary fittings:                       | S                      |
| Class:                                                           | XS 1                   |
| EN 15651-4: sealant for pedestrian floorings:                    | PW-EX-INT              |
| Class:                                                           | 12.5 E                 |
| Tensile strength - according to ISO 37:                          | 1.6 N/mm <sup>2</sup>  |
| Elongation at break - according to ISO 37-3:                     | 800%                   |
| Tear strength (ISO 34-1, die C):                                 | 4 N/mm                 |
| Shore A hardness (ISO 868):                                      | 20                     |
| Density at +25°C (ISO 1183- 1 A):                                | 1.02 g/cm <sup>3</sup> |
| Modulus of elongation measured according to ISO 8339 METHOD A:   |                        |
| - at 25% elongation:                                             | 0.20 N/mm <sup>2</sup> |
| - at 50% elongation:                                             | 0.27 N/mm <sup>2</sup> |
| - at 100% elongation:                                            | 0.35 N/mm <sup>2</sup> |
| Maximum movement allowed according to EN 15651-1 and EN 15651-2: | 25%                    |
| Maximum movement allowed on floors according to EN 15651-4:      | 12.5%                  |
| Resistance to water:                                             | excellent              |
| Resistance to ageing:                                            | excellent              |
| Resistance to atmospheric agents:                                | excellent              |
| Resistance to chemicals, acids and diluted alkalis:              | good                   |
| Resistance to soap and detergents:                               | excellent              |
| Resistance to solvents:                                          | limited                |
| Resistance to temperature:                                       | from -40°C to +180°C   |

## WARNING

*Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application.*

Please refer to the current version of the Technical Data Sheet, available from our website [www.mapei.com](http://www.mapei.com)

## LEGAL NOTICE

*The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in force at the time of the MAPEI product installation.*

*The most up-to-date TDS can be downloaded from our website [www.mapei.com](http://www.mapei.com). [www.mapei.com](http://www.mapei.com).*

**ANY ALTERATION TO THE WORDING OR REQUIREMENTS CONTAINED OR DERIVED FROM THIS TDS EXCLUDES THE RESPONSIBILITY OF MAPEI.**



8139-7-2026 en (IT)

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

